



ValerStudios

Smart Contract Review

Deliverable: Smart Contract Audit Report

Security Report

November 2021

Disclaimer

The information and views set out in this publication are those of the author(s) and do not necessarily reflect the official opinion of the Company. The content, conclusions and recommendations set out in this publication are elaborated in the specific for only project.

eNebula Solutions does not guarantee the authenticity of the project or organization or team of members that is connected/owner behind the project or nor accuracy of the data included in this study. All representations, warranties, undertakings and guarantees relating to the report are excluded, particularly concerning – but not limited to – the qualities of the assessed projects and products. Neither the Company nor any person acting on the Company's behalf may be held responsible for the use that may be made of the information contained herein.

eNebula Solutions retains the right to display audit reports and other content elements as examples of their work in their portfolio and as content features in other projects with protecting all security purpose of customer. The report containing confidential information can be used internally by the Customer, or it can be disclosed publicly after all vulnerabilities fixed - upon a decision of the Customer.

© eNebula Solutions, 2021.

Report Summary

Title	VALERSTUDIOS Smart Contract Audit		
Project Owner	VALERSTUDIOS		
Type	Public		
Reviewed by	Vatsal Raychura	Revision date	25/11/2021
Approved by	eNebula Solutions Private Limited	Approval date	25/11/2021
N° Pages			26

Overview

Background

VALERSTUDIOS's team requested that eNebula Solutions perform an Extensive Smart Contract audit of their EvlrStaker Smart Contract.

Project Dates

The following is the project schedule for this review and report:

- **November 25:** Smart Contract Review Completed (*Completed*)
- **November 25:** Delivery of Smart Contract Audit Report (*Completed*)

Review Team

The following eNebula Solutions team member participated in this review:

- Sejal Barad, Security Researcher and Engineer
- Vatsal Raychura, Security Researcher and Engineer

Coverage

Target Specification and Revision

For this audit, we performed research, investigation, and review of the smart contract of VALERSTUDIOS.

The following documentation repositories were considered in-scope for the review:

- VALERSTUDIOS Project:
<https://github.com/valerstudios/VLR-Staking>

Introduction

Given the opportunity to review VALERSTUDIOS's Contract related smart contract source code, we in the report outline our systematic approach to evaluate potential security issues in the smart contract implementation, expose possible semantic inconsistencies between smart contract code and design document, and provide additional suggestions or recommendations for improvement. Our results show that the given version of smart contracts is ready to launch after resolving the mentioned issues, there are no critical or high issues found related to business logic, security or performance.

About VALERSTUDIOS: -

Item	Description
Issuer	VALERSTUDIOS
Website	www.valerstudios.com
Platform	Solidity
Audit Method	Whitebox
Latest Audit Report	November 25, 2021

The Test Method Information: -

Test method	Description
Black box testing	Conduct security tests from an attacker's perspective externally.
Grey box testing	Conduct security testing on code modules through the scripting tool, observing the internal running status, mining weaknesses.
White box testing	Based on the open-source code, non-open-source code, to detect whether there are vulnerabilities in programs such as nodes, SDK, etc.

Smart Contract Audit

The vulnerability severity level information:

Level	Description
Critical	Critical severity vulnerabilities will have a significant effect on the security of the DeFi project, and it is strongly recommended to fix the critical vulnerabilities.
High	High severity vulnerabilities will affect the normal operation of the DeFi project. It is strongly recommended to fix high-risk vulnerabilities.
Medium	Medium severity vulnerability will affect the operation of the DeFi project. It is recommended to fix medium-risk vulnerabilities.
Low	Low severity vulnerabilities may affect the operation of the DeFi project in certain scenarios. It is suggested that the project party should evaluate and consider whether these vulnerabilities need to be fixed.
Weakness	There are safety risks theoretically, but it is extremely difficult to reproduce in engineering.

The Full List of Check Items:

Category	Check Item
Basic Coding Bugs	Constructor Mismatch
	Ownership Takeover
	Redundant Fallback Function
	Overflows & Underflows
	Reentrancy
	MONEY-Giving Bug
	Blackhole
	Unauthorized Self-Destruct
	Revert DoS
	Unchecked External Call
	Gasless Send
	Send Instead of Transfer
	Costly Loop
	(Unsafe) Use of Untrusted Libraries
	(Unsafe) Use of Predictable Variables
	Transaction Ordering Dependence
Deprecated Uses	
Semantic Consistency Checks	Semantic Consistency Checks
	Business Logics Review
	Functionality Checks

Smart Contract Audit

Advanced DeFi Scrutiny	Authentication Management
	Access Control & Authorization
	Oracle Security
	Digital Asset Escrow
	Kill-Switch Mechanism
	Operation Trails & Event Generation
	ERC20 Idiosyncrasies Handling
	Frontend-Contract Integration
	Deployment Consistency
	Holistic Risk Management
Additional Recommendations	Avoiding Use of Variadic Byte Array
	Using Fixed Compiler Version
	Making Visibility Level Explicit
	Making Type Inference Explicit
	Adhering To Function Declaration Strictly
	Following Other Best Practices

Common Weakness Enumeration (CWE) Classifications Used in This Audit:

Category	Summary
Configuration	Weaknesses in this category are typically introduced during the configuration of the software.
Data Processing Issues	Weaknesses in this category are typically found in functionality that processes data.
Numeric Errors	Weaknesses in this category are related to improper calculation or conversion of numbers.
Security Features	Weaknesses in this category are concerned with topics like authentication, access control, confidentiality, cryptography, and privilege management. (Software security is not security software.)
Time and State	Weaknesses in this category are related to the improper management of time and state in an environment that supports simultaneous or near-simultaneous computation by multiplesystems, processes, or threads.
Error Conditions, Return Values, Status Codes	Weaknesses in this category include weaknesses that occur if a function does not generate the correct return/status code, or if the application does not handle all possible return/status codes that could be generated by a function.
Resource Management	Weaknesses in this category are related to improper management of system resources.

Smart Contract Audit

Behavioral Issues	Weaknesses in this category are related to unexpected behaviors from code that an application uses.
Business Logics	Weaknesses in this category identify some of the underlying problems that commonly allow attackers to manipulate the business logic of an application. Errors in business logic can be devastating to an entire application.
Initialization and Cleanup	Weaknesses in this category occur in behaviors that are used for initialization and breakdown.
Arguments and Parameters	Weaknesses in this category are related to improper use arguments or parameters within function calls.
Expression Issues	Weaknesses in this category are related to incorrectly written expressions within code.
Coding Practices	Weaknesses in this category are related to coding practices that are deemed unsafe and increase the chances that an exploitable vulnerability will be present in the application. They may not directly introduce a vulnerability, but indicate the product has not been carefully developed or maintained.

Findings

Summary

Here is a summary of our findings after analyzing the VALERSTUDIOS Smart Contract Review. During the first phase of our audit, we studied the smart contract source code and ran our in-house static code analyzer through the Specific tool. The purpose here is to statically identify known coding bugs, and then manually verify (reject or confirm) issues reported by tool. We further manually review business logics, examine system operations, and place DeFi-related aspects under scrutiny to uncover possible pitfalls and/or bugs.

Severity	No. of Issues
Critical	0
High	0
Medium	0
Low	2
Total	2


We have so far identified that there are potential issues with severity of **0 Critical, 0 High, 0 Medium, and 2 Low**. Overall, these smart contracts are well-designed and engineered.

Functional Overview

(\$) = payable function	[Pub] public
# = non-constant function	[Ext] external
	[Prv] private
	[Int] internal

```
+ EvlrStaker (ERC20)
- [Pub] <Constructor> #
  - modifiers: ERC20
- [Ext] getCharityAddress
- [Ext] getStakingRewardsBag
- [Ext] getStake
- [Pub] getStakeValue
- [Pub] stake #
- [Pub] stakeWithTimeParameters #
- [Ext] unstake #
- [Prv] _bagsOwned
- [Ext] distributeRewards #
- [Prv] resetRewardsStakes #
- [Pub] getTotalStakedValue
- [Prv] _createStakeBag #
- [Prv] closeUnstakedBags #
```

Inheritance

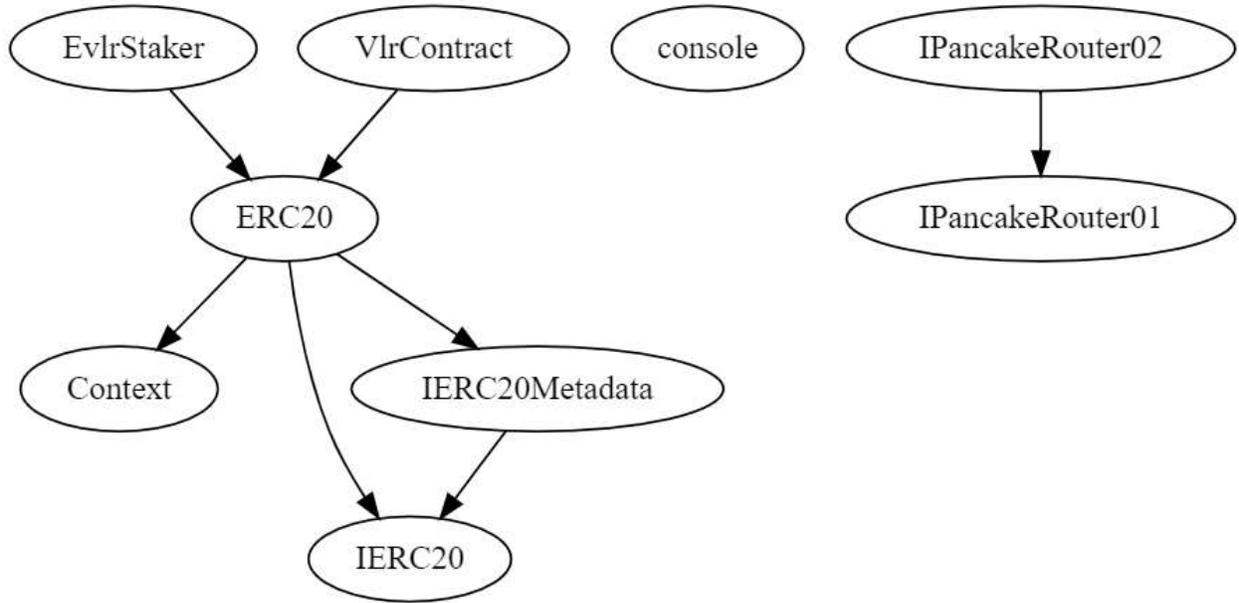

Detailed Results

Issues Checking Status

1. Floating Pragma

- SWC ID: 103
- Severity: Low
- Location: EvlrStaker.sol
- Relationships: CWE-664: Improper Control of a Resource Through its Lifetime
- Description: A floating pragma is set. The current pragma Solidity directive is ""^0.8.0"". It is recommended to specify a fixed compiler version to ensure that the bytecode produced does not vary between builds. This is especially important if you rely on bytecode-level verification of the code.

```
9  
10  pragma solidity ^0.8.0;  
11
```

- Remediations: Lock the pragma version and also consider known bugs (<https://github.com/ethereum/solidity/releases>) for the compiler version that is chosen.

2. Missing zero address validation

- Severity: Low
- Location: EvlrStaker.sol
- Description: Detect missing zero address validation.

```
29     constructor(  
30         address _eVlrContractAddress,  
31         address _charityBagAddress,  
32         address _distributorAddress,  
33         uint _stakingFee,    // a percentage over 1000 ie _stakingFee = 9 gives 0.9%  
34         uint _charityFee,    // a percentage over 1000 ie _stakingFee = 9 gives 0.9%  
35         uint _burnFee    // a percentage over 1000 ie _stakingFee = 9 gives 0.9%  
36     ) ERC20("Staked VLR Token", "SVLR") {  
37         eVlrContract = ERC20(_eVlrContractAddress);  
38         stakingRewardsBag = 0;  
39         charityBagAddress = _charityBagAddress;  
40         distributor = _distributorAddress;  
41         stakingFee = _stakingFee;  
42         charityFee = _charityFee;  
43         burnFee = _burnFee;  
44     }  
45 }
```

- Remediations: Check that the address is not zero.

Smart Contract Audit

Automated Tool Results

Slither: -

```
EvlrStaker.stake(uint256) (EvlrStaker.sol#96-138) ignores return value by eVlContract.transferFrom(msg.sender,charityBagAddress,charityFeePaid) (EvlrStaker.sol#127-131)
EvlrStaker.stake(uint256) (EvlrStaker.sol#96-138) ignores return value by eVlContract.transferFrom(msg.sender,burnAddress,burnFeePaid) (EvlrStaker.sol#131)
EvlrStaker.stake(uint256) (EvlrStaker.sol#96-138) ignores return value by eVlContract.transferFrom(msg.sender,address(this),_stakedVrAmount - burnFeePaid - charityFeePaid) (EvlrStaker.sol#133-137)
EvlrStaker.stakeWithTimeParameters(uint256,uint256,uint256) (EvlrStaker.sol#140-188) ignores return value by eVlContract.transferFrom(msg.sender,charityBagAddress,charityFeePaid) (EvlrStaker.sol#178-179)
EvlrStaker.stakeWithTimeParameters(uint256,uint256,uint256) (EvlrStaker.sol#140-188) ignores return value by eVlContract.transferFrom(msg.sender,burnAddress,burnFeePaid) (EvlrStaker.sol#180)
EvlrStaker.stakeWithTimeParameters(uint256,uint256,uint256) (EvlrStaker.sol#140-188) ignores return value by eVlContract.transferFrom(msg.sender,address(this),_stakedVrAmount - burnFeePaid - charityFeePaid) (EvlrStaker.sol#182-185)
EvlrStaker.unstake(uint256) (EvlrStaker.sol#188-226) ignores return value by eVlContract.transfer(msg.sender,vlrReturned - stakingFeePaid - charityFeePaid - burnFeePaid) (EvlrStaker.sol#217-220)
EvlrStaker.unstake(uint256) (EvlrStaker.sol#188-226) ignores return value by eVlContract.transfer(charityBagAddress,charityFeePaid) (EvlrStaker.sol#221-222)
EvlrStaker.unstake(uint256) (EvlrStaker.sol#188-226) ignores return value by eVlContract.transfer(burnAddress,burnFeePaid) (EvlrStaker.sol#224)
EvlrStaker.distributeRewards(uint256) (EvlrStaker.sol#241-258) ignores return value by eVlContract.transfer(stakes[i].ownerAddress,transferAmount) (EvlrStaker.sol#255)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#checked-transfer

EvlrStaker.getStakeValue(uint256,uint256) (EvlrStaker.sol#78-94) performs a multiplication on the result of a division:
- bagValue = ((selectedBag.stopTime - selectedBag.startTime) / 86400) * selectedBag.stakedTokens (EvlrStaker.sol#90-92)
EvlrStaker.getStakeValue(uint256,uint256) (EvlrStaker.sol#78-94) performs a multiplication on the result of a division:
- bagValue = ((endTime - selectedBag.startTime) / 86400) * selectedBag.stakedTokens (EvlrStaker.sol#86-88)
EvlrStaker.getTotalStakedValue(uint256) (EvlrStaker.sol#273-296) performs a multiplication on the result of a division:
- stakedTime_scope_0 = (endTime - stakes[i].startTime) / 86400 (EvlrStaker.sol#283)
- totalValue += (stakedTime_scope_0 * stakes[i].stakedTokens) (EvlrStaker.sol#286)
EvlrStaker.getTotalStakedValue(uint256) (EvlrStaker.sol#273-296) performs a multiplication on the result of a division:
- stakedTime = (stakes[i].stopTime - stakes[i].startTime) / 86400 (EvlrStaker.sol#281-282)
- totalValue += (stakedTime * stakes[i].stakedTokens) (EvlrStaker.sol#283)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#divide-before-multiply

EvlrStaker._bagsOwned(address) (EvlrStaker.sol#228-239) uses a dangerous strict equality:
- stakes[i].ownerAddress == owner (EvlrStaker.sol#235)
EvlrStaker.closeUnstakedBags(address,uint256) (EvlrStaker.sol#306-320) uses a dangerous strict equality:
- stakes[i].ownerAddress == owner (EvlrStaker.sol#309)
EvlrStaker.getStakeValue(uint256,uint256) (EvlrStaker.sol#78-94) uses a dangerous strict equality:
- selectedBag.stopTime == 0 (EvlrStaker.sol#85)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#dangerous-strict-equalities

Reentrancy in EvlrStaker.unstake(uint256) (EvlrStaker.sol#188-226):
  External calls:
  - eVlContract.transfer(msg.sender,vlrReturned - stakingFeePaid - charityFeePaid - burnFeePaid) (EvlrStaker.sol#217-220)
  State variables written after the call(s):
  - _burn(msg.sender,_unstakedAmount) (EvlrStaker.sol#221)
  - _balances[account] = accountBalance - amount (ERC20.sol#282)
  - _burn(msg.sender,_unstakedAmount) (EvlrStaker.sol#221)
  - totalSupply += amount (ERC20.sol#284)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#reentrancy-vulnerabilities-1

EvlrStaker._createStakeBag(uint256,uint256,uint256,address).newBag (EvlrStaker.sol#298) is a local variable never initialized
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#uninitialized-local-variables

EvlrStaker.unstake(uint256).totalSupply (EvlrStaker.sol#288) shadows:
- ERC20.totalSupply() (ERC20.sol#93-95) (function)
- ERC20.totalSupply() (ERC20.sol#12) (function)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#local-variable-shadowing

EvlrStaker.stake(uint256) (EvlrStaker.sol#96-138) should emit an event for:
- stakingRewardsBag == stakingFeePaid (EvlrStaker.sol#113)
EvlrStaker.stakeWithTimeParameters(uint256,uint256,uint256) (EvlrStaker.sol#140-188) should emit an event for:
- stakingRewardsBag == stakingFeePaid (EvlrStaker.sol#161)
EvlrStaker.unstake(uint256) (EvlrStaker.sol#188-226) should emit an event for:
- stakingRewardsBag == stakingFeePaid (EvlrStaker.sol#204)
- stakingRewardsBag == vlrReturned (EvlrStaker.sol#215)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#missing-events-arithmetic

EvlrStaker.constructor(address,address,address,uint256,uint256,uint256)._charityBagAddress (EvlrStaker.sol#31) lacks a zero-check on :
- charityBagAddress = charityBagAddress (EvlrStaker.sol#39)
EvlrStaker.constructor(address,address,address,uint256,uint256,uint256)._distributorAddress (EvlrStaker.sol#32) lacks a zero-check on :
- distributor = distributorAddress (EvlrStaker.sol#40)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#missing-zero-address-validation

EvlrStaker.distributeRewards(uint256) (EvlrStaker.sol#241-258) has external calls inside a loop: eVlContract.transfer(stakes[i].ownerAddress,transferAmount) (EvlrStaker.sol#255)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#calls-inside-a-loop
```

Smart Contract Audit

```
Reentrancy in EvmStaker.unstake(uint256) (EvmStaker.sol#188-226):
  External calls:
  - evmContract.transfer(msg.sender, vlrReturned - stakingFeePaid - charityFeePaid - burnFeePaid) (EvmStaker.sol#217-220)
  - evmContract.transfer(charityBagAddress, charityFeePaid) (EvmStaker.sol#223)
  - evmContract.transfer(burnAddress, burnFeePaid) (EvmStaker.sol#224)
  State variables written after the call(s):
  - closeUnstakedBags(msg.sender, unstakedAmount) (EvmStaker.sol#225)
    - stakes[i].stopTime = block.timestamp (EvmStaker.sol#211)
    - stakes[i].stakedTokens = remainder (EvmStaker.sol#216)
Reference: https://github.com/cryptic/sliether/wiki/Detector-Documentation#reentrancy-vulnerabilities-2
```

```
Reentrancy in EvmStaker.unstake(uint256) (EvmStaker.sol#188-226):
  External calls:
  - evmContract.transfer(msg.sender, vlrReturned - stakingFeePaid - charityFeePaid - burnFeePaid) (EvmStaker.sol#217-220)
  Event emitted after the call(s):
  - Transfer(account, address(0), amount) (ERC20.sol#286)
    - _burn(msg.sender, unstakedAmount) (EvmStaker.sol#221)
Reference: https://github.com/cryptic/sliether/wiki/Detector-Documentation#reentrancy-vulnerabilities-3
```

EvmStaker.getStakeValue(uint256, uint256) (EvmStaker.sol#78-94) uses timestamp for comparisons.

```
Dangerous comparisons:
- selectedBag.stopTime == 0 (EvmStaker.sol#85)
EvmStaker.bagsOwned(address) (EvmStaker.sol#228-238) uses timestamp for comparisons
Dangerous comparisons:
- i < stakes.length (EvmStaker.sol#234)
- stakes[i].ownerAddress == owner (EvmStaker.sol#235)
EvmStaker.distributeRewards(uint256) (EvmStaker.sol#241-258) uses timestamp for comparisons
Dangerous comparisons:
- i < stakes.length (EvmStaker.sol#251)
EvmStaker.resetRewardsStakes() (EvmStaker.sol#260-276) uses timestamp for comparisons
Dangerous comparisons:
- i < stakes.length (EvmStaker.sol#261)
- stakes[i].stopTime > 0 (EvmStaker.sol#262)
EvmStaker.getTotalStakedValue(uint256) (EvmStaker.sol#273-296) uses timestamp for comparisons
Dangerous comparisons:
- i < stakes.length (EvmStaker.sol#279)
- stakes[i].stopTime > 0 (EvmStaker.sol#280)
EvmStaker.closeUnstakedBags(address, uint256) (EvmStaker.sol#306-328) uses timestamp for comparisons
Dangerous comparisons:
- i < stakes.length (EvmStaker.sol#306)
- stakes[i].ownerAddress == owner (EvmStaker.sol#309)
- stakedSum + stakes[i].stakedTokens == totalRemoved (EvmStaker.sol#316)
Reference: https://github.com/cryptic/sliether/wiki/Detector-Documentation#block-timestamp
```

```
console.sendLogPayload(bytes) (console.sol#7-14) uses assembly
- INLINE ASM (console.sol#10-13)
Reference: https://github.com/cryptic/sliether/wiki/Detector-Documentation#assembly-usage
```

Different versions of solidity is used:

- Version used: ['>=0.4.22<0.9.0', '>=0.6.2', '^0.8.0']
- ^0.8.0 (Context.sol#3)
- ^0.8.0 (ERC20.sol#3)
- ^0.8.0 (EvmStaker.sol#18)
- ^0.8.0 (ERC28.sol#33)
- ^0.8.0 (ERC28Metadata.sol#3)
- >=0.6.2 (IPancakeRouter01.sol#1)
- >=0.6.2 (IPancakeRouter02.sol#1)
- ^0.8.0 (VmrContract.sol#2)
- >=0.4.22<0.9.0 (console.sol#2)

Reference: <https://github.com/cryptic/sliether/wiki/Detector-Documentation#different-pragma-directives-are-used>

```
Context.msgData() (Context.sol#20-22) is never used and should be removed
EvmStaker.bagsOwned(address) (EvmStaker.sol#228-239) is never used and should be removed
console.sendLogPayload(bytes) (console.sol#7-14) is never used and should be removed
console.log() (console.sol#16-10) is never used and should be removed
console.log(address) (console.sol#104-106) is never used and should be removed
console.log(address, address) (console.sol#248-250) is never used and should be removed
console.log(address, address, address) (console.sol#394-396) is never used and should be removed
console.log(address, address, address, address) (console.sol#1528-1530) is never used and should be removed
console.log(address, address, address, bool) (console.sol#1524-1526) is never used and should be removed
console.log(address, address, address, string) (console.sol#1520-1522) is never used and should be removed
console.log(address, address, address, uint256) (console.sol#1516-1518) is never used and should be removed
console.log(address, address, bool) (console.sol#500-502) is never used and should be removed
console.log(address, address, bool, address) (console.sol#1512-1514) is never used and should be removed
console.log(address, address, bool, bool) (console.sol#1508-1510) is never used and should be removed
console.log(address, address, bool, string) (console.sol#1504-1506) is never used and should be removed
console.log(address, address, bool, uint256) (console.sol#1500-1502) is never used and should be removed
console.log(address, address, string) (console.sol#496-498) is never used and should be removed
console.log(address, address, string, address) (console.sol#492-494) is never used and should be removed
console.log(address, address, string, bool) (console.sol#1492-1494) is never used and should be removed
console.log(address, address, string, string) (console.sol#1488-1490) is never used and should be removed
console.log(address, address, string, uint256) (console.sol#1484-1486) is never used and should be removed
console.log(address, address, uint256) (console.sol#1480-1482) is never used and should be removed
console.log(address, address, uint256, bool) (console.sol#1476-1478) is never used and should be removed
console.log(address, address, uint256, string) (console.sol#1472-1474) is never used and should be removed
```

Smart Contract Audit

```
console.log(address,address,uint256,uint256) (console.sol#1406-1470) is never used and should be removed
console.log(address,bool) (console.sol#1244-246) is never used and should be removed
console.log(address,bool,address) (console.sol#488-490) is never used and should be removed
console.log(address,bool,address,address) (console.sol#1464-1466) is never used and should be removed
console.log(address,bool,address,bool) (console.sol#1408-1422) is never used and should be removed
console.log(address,bool,address,string) (console.sol#1456-1458) is never used and should be removed
console.log(address,bool,address,uint256) (console.sol#1452-1454) is never used and should be removed
console.log(address,bool,bool) (console.sol#484-486) is never used and should be removed
console.log(address,bool,bool,address) (console.sol#1448-1450) is never used and should be removed
console.log(address,bool,bool,bool) (console.sol#1444-1446) is never used and should be removed
console.log(address,bool,bool,string) (console.sol#1440-1442) is never used and should be removed
console.log(address,bool,bool,uint256) (console.sol#1436-1438) is never used and should be removed
console.log(address,bool,string) (console.sol#480-482) is never used and should be removed
console.log(address,bool,string,address) (console.sol#1432-1434) is never used and should be removed
console.log(address,bool,string,bool) (console.sol#1428-1430) is never used and should be removed
console.log(address,bool,string,string) (console.sol#1424-1426) is never used and should be removed
console.log(address,bool,string,uint256) (console.sol#1420-1422) is never used and should be removed
console.log(address,bool,uint256) (console.sol#476-478) is never used and should be removed
console.log(address,bool,uint256,address) (console.sol#1416-1418) is never used and should be removed
console.log(address,bool,uint256,bool) (console.sol#1412-1414) is never used and should be removed
console.log(address,bool,uint256,string) (console.sol#1408-1410) is never used and should be removed
console.log(address,bool,uint256,uint256) (console.sol#1404-1406) is never used and should be removed
console.log(address,string) (console.sol#240-242) is never used and should be removed
console.log(address,string,address) (console.sol#472-474) is never used and should be removed
console.log(address,string,address,address) (console.sol#1400-1402) is never used and should be removed
console.log(address,string,address,bool) (console.sol#1396-1398) is never used and should be removed
console.log(address,string,address,string) (console.sol#1392-1394) is never used and should be removed
console.log(address,string,address,uint256) (console.sol#1388-1390) is never used and should be removed
console.log(address,string,bool) (console.sol#468-470) is never used and should be removed
console.log(address,string,bool,address) (console.sol#1384-1386) is never used and should be removed
console.log(address,string,bool,bool) (console.sol#1380-1382) is never used and should be removed
console.log(address,string,bool,string) (console.sol#1376-1378) is never used and should be removed
console.log(address,string,bool,uint256) (console.sol#1372-1374) is never used and should be removed
console.log(address,string,string) (console.sol#464-466) is never used and should be removed
console.log(address,string,string,address) (console.sol#1368-1370) is never used and should be removed
console.log(address,string,string,bool) (console.sol#1364-1366) is never used and should be removed
console.log(address,string,string,string) (console.sol#1360-1362) is never used and should be removed
console.log(address,string,string,uint256) (console.sol#1356-1358) is never used and should be removed
console.log(address,string,uint256) (console.sol#460-462) is never used and should be removed
console.log(address,string,uint256,address) (console.sol#1352-1354) is never used and should be removed
console.log(address,string,uint256,bool) (console.sol#1348-1350) is never used and should be removed
console.log(address,string,uint256,string) (console.sol#1344-1346) is never used and should be removed
console.log(address,string,uint256,uint256) (console.sol#1340-1342) is never used and should be removed
console.log(address,uint256) (console.sol#236-238) is never used and should be removed
console.log(address,uint256,address) (console.sol#456-458) is never used and should be removed
console.log(address,uint256,address,address) (console.sol#1336-1338) is never used and should be removed
console.log(address,uint256,address,bool) (console.sol#1332-1334) is never used and should be removed
console.log(address,uint256,address,string) (console.sol#1328-1330) is never used and should be removed
console.log(address,uint256,address,uint256) (console.sol#1324-1326) is never used and should be removed
console.log(address,uint256,bool) (console.sol#452-454) is never used and should be removed
console.log(address,uint256,bool,address) (console.sol#1320-1322) is never used and should be removed
console.log(address,uint256,bool,bool) (console.sol#1316-1318) is never used and should be removed
console.log(address,uint256,bool,string) (console.sol#1312-1314) is never used and should be removed
console.log(address,uint256,bool,uint256) (console.sol#1308-1310) is never used and should be removed
console.log(address,uint256,string) (console.sol#448-450) is never used and should be removed
console.log(address,uint256,string,address) (console.sol#1304-1306) is never used and should be removed
console.log(address,uint256,string,bool) (console.sol#1300-1302) is never used and should be removed
console.log(address,uint256,string,string) (console.sol#1296-1298) is never used and should be removed
console.log(address,uint256,string,uint256) (console.sol#1292-1294) is never used and should be removed
console.log(address,uint256,uint256) (console.sol#444-446) is never used and should be removed
console.log(address,uint256,uint256,address) (console.sol#1288-1290) is never used and should be removed
console.log(address,uint256,uint256,bool) (console.sol#1284-1286) is never used and should be removed
console.log(address,uint256,uint256,string) (console.sol#1280-1282) is never used and should be removed
console.log(address,uint256,uint256,uint256) (console.sol#1276-1278) is never used and should be removed
console.log(bool) (console.sol#180-182) is never used and should be removed
console.log(bool,address) (console.sol#232-234) is never used and should be removed
console.log(bool,address,address) (console.sol#440-442) is never used and should be removed
console.log(bool,address,address,address) (console.sol#1272-1274) is never used and should be removed
console.log(bool,address,address,bool) (console.sol#1268-1270) is never used and should be removed
console.log(bool,address,address,string) (console.sol#1264-1266) is never used and should be removed
console.log(bool,address,address,uint256) (console.sol#1260-1262) is never used and should be removed
console.log(bool,address,bool) (console.sol#436-438) is never used and should be removed
console.log(bool,address,bool,address) (console.sol#1256-1258) is never used and should be removed
console.log(bool,address,bool,bool) (console.sol#1252-1254) is never used and should be removed
console.log(bool,address,bool,string) (console.sol#1248-1250) is never used and should be removed
console.log(bool,address,bool,uint256) (console.sol#1244-1246) is never used and should be removed
console.log(bool,address,string) (console.sol#432-434) is never used and should be removed
console.log(bool,address,string,address) (console.sol#1240-1242) is never used and should be removed
console.log(bool,address,string,bool) (console.sol#1236-1238) is never used and should be removed
console.log(bool,address,string,string) (console.sol#1232-1234) is never used and should be removed
console.log(bool,address,string,uint256) (console.sol#1228-1230) is never used and should be removed
console.log(bool,address,uint256) (console.sol#428-430) is never used and should be removed
console.log(bool,address,uint256,address) (console.sol#1224-1226) is never used and should be removed
console.log(bool,address,uint256,bool) (console.sol#1220-1222) is never used and should be removed
console.log(bool,address,uint256,string) (console.sol#1216-1218) is never used and should be removed
console.log(bool,address,uint256,uint256) (console.sol#1212-1214) is never used and should be removed
```

Smart Contract Audit

```
console.log(bool,bool) (console.sol#228-230) is never used and should be removed
console.log(bool,bool,address) (console.sol#424-426) is never used and should be removed
console.log(bool,bool,address,address) (console.sol#1208-1210) is never used and should be removed
console.log(bool,bool,address,bool) (console.sol#1204-1206) is never used and should be removed
console.log(bool,bool,address,string) (console.sol#1208-1202) is never used and should be removed
console.log(bool,bool,address,uint256) (console.sol#1196-1198) is never used and should be removed
console.log(bool,bool,bool) (console.sol#428-422) is never used and should be removed
console.log(bool,bool,bool,address) (console.sol#1192-1194) is never used and should be removed
console.log(bool,bool,bool,bool) (console.sol#1188-1190) is never used and should be removed
console.log(bool,bool,bool,string) (console.sol#1184-1186) is never used and should be removed
console.log(bool,bool,bool,uint256) (console.sol#1180-1182) is never used and should be removed
console.log(bool,bool,string) (console.sol#456-418) is never used and should be removed
console.log(bool,bool,string,address) (console.sol#1178-1178) is never used and should be removed
console.log(bool,bool,string,bool) (console.sol#1172-1174) is never used and should be removed
console.log(bool,bool,string,string) (console.sol#1168-1170) is never used and should be removed
console.log(bool,bool,string,uint256) (console.sol#1164-1166) is never used and should be removed
console.log(bool,bool,uint256) (console.sol#412-414) is never used and should be removed
console.log(bool,bool,uint256,address) (console.sol#1160-1162) is never used and should be removed
console.log(bool,bool,uint256,bool) (console.sol#1156-1158) is never used and should be removed
console.log(bool,bool,uint256,string) (console.sol#1152-1154) is never used and should be removed
console.log(bool,bool,uint256,uint256) (console.sol#1148-1150) is never used and should be removed
console.log(bool,string) (console.sol#224-226) is never used and should be removed
console.log(bool,string,address) (console.sol#408-410) is never used and should be removed
console.log(bool,string,address,address) (console.sol#1144-1146) is never used and should be removed
console.log(bool,string,address,bool) (console.sol#1140-1142) is never used and should be removed
console.log(bool,string,address,string) (console.sol#1136-1138) is never used and should be removed
console.log(bool,string,address,uint256) (console.sol#1132-1134) is never used and should be removed
console.log(bool,string,bool) (console.sol#404-406) is never used and should be removed
console.log(bool,string,bool,address) (console.sol#1128-1130) is never used and should be removed
console.log(bool,string,bool,bool) (console.sol#1124-1126) is never used and should be removed
console.log(bool,string,bool,string) (console.sol#1120-1122) is never used and should be removed
console.log(bool,string,bool,uint256) (console.sol#1116-1118) is never used and should be removed
console.log(bool,string,string) (console.sol#400-402) is never used and should be removed
console.log(bool,string,string,address) (console.sol#1112-1114) is never used and should be removed
console.log(bool,string,string,bool) (console.sol#1108-1110) is never used and should be removed
console.log(bool,string,string,string) (console.sol#1104-1106) is never used and should be removed
console.log(bool,string,string,uint256) (console.sol#1100-1102) is never used and should be removed
console.log(bool,string,uint256) (console.sol#396-398) is never used and should be removed
console.log(bool,string,uint256,address) (console.sol#1096-1098) is never used and should be removed
console.log(bool,string,uint256,bool) (console.sol#1092-1094) is never used and should be removed
console.log(bool,string,uint256,string) (console.sol#1088-1090) is never used and should be removed
console.log(bool,string,uint256,uint256) (console.sol#1084-1086) is never used and should be removed
console.log(bool,uint256) (console.sol#226-222) is never used and should be removed
console.log(bool,uint256,address) (console.sol#392-394) is never used and should be removed
console.log(bool,uint256,address,address) (console.sol#1080-1082) is never used and should be removed
console.log(bool,uint256,address,bool) (console.sol#1076-1078) is never used and should be removed
console.log(bool,uint256,address,string) (console.sol#1072-1074) is never used and should be removed
console.log(bool,uint256,address,uint256) (console.sol#1068-1070) is never used and should be removed
console.log(bool,uint256,bool) (console.sol#388-390) is never used and should be removed
console.log(bool,uint256,bool,address) (console.sol#1064-1066) is never used and should be removed
console.log(bool,uint256,bool,bool) (console.sol#1060-1062) is never used and should be removed
console.log(bool,uint256,bool,string) (console.sol#1056-1058) is never used and should be removed
console.log(bool,uint256,bool,uint256) (console.sol#1052-1054) is never used and should be removed
console.log(bool,uint256,string) (console.sol#384-386) is never used and should be removed
console.log(bool,uint256,string,address) (console.sol#1048-1050) is never used and should be removed
console.log(bool,uint256,string,bool) (console.sol#1044-1046) is never used and should be removed
console.log(bool,uint256,string,string) (console.sol#1040-1042) is never used and should be removed
console.log(bool,uint256,string,uint256) (console.sol#1036-1038) is never used and should be removed
console.log(bool,uint256,uint256) (console.sol#380-382) is never used and should be removed
console.log(bool,uint256,uint256,address) (console.sol#1032-1034) is never used and should be removed
console.log(bool,uint256,uint256,bool) (console.sol#1028-1030) is never used and should be removed
console.log(bool,uint256,uint256,string) (console.sol#1024-1026) is never used and should be removed
console.log(bool,uint256,uint256,uint256) (console.sol#1020-1022) is never used and should be removed
console.log(string) (console.sol#176-178) is never used and should be removed
console.log(string,address) (console.sol#216-218) is never used and should be removed
console.log(string,address,address) (console.sol#376-378) is never used and should be removed
console.log(string,address,address,address) (console.sol#1016-1018) is never used and should be removed
console.log(string,address,address,bool) (console.sol#1012-1014) is never used and should be removed
console.log(string,address,address,string) (console.sol#1008-1010) is never used and should be removed
console.log(string,address,address,uint256) (console.sol#1004-1006) is never used and should be removed
console.log(string,address,bool) (console.sol#372-374) is never used and should be removed
console.log(string,address,bool,address) (console.sol#1000-1002) is never used and should be removed
console.log(string,address,bool,bool) (console.sol#996-998) is never used and should be removed
console.log(string,address,bool,string) (console.sol#992-994) is never used and should be removed
console.log(string,address,bool,uint256) (console.sol#988-990) is never used and should be removed
console.log(string,address,string) (console.sol#368-370) is never used and should be removed
console.log(string,address,string,address) (console.sol#984-986) is never used and should be removed
console.log(string,address,string,bool) (console.sol#980-982) is never used and should be removed
console.log(string,address,string,string) (console.sol#976-978) is never used and should be removed
console.log(string,address,uint256) (console.sol#972-974) is never used and should be removed
console.log(string,address,uint256) (console.sol#364-366) is never used and should be removed
console.log(string,address,uint256,address) (console.sol#968-970) is never used and should be removed
console.log(string,address,uint256,bool) (console.sol#964-966) is never used and should be removed
console.log(string,address,uint256,string) (console.sol#960-962) is never used and should be removed
console.log(string,address,uint256,uint256) (console.sol#956-958) is never used and should be removed
console.log(string,bool) (console.sol#212-214) is never used and should be removed
```

Smart Contract Audit

```
console.log(string,bool,address) (console.sol#368-362) is never used and should be removed
console.log(string,bool,address,address) (console.sol#952-954) is never used and should be removed
console.log(string,bool,address,bool) (console.sol#948-950) is never used and should be removed
console.log(string,bool,address,string) (console.sol#944-946) is never used and should be removed
console.log(string,bool,address,uint256) (console.sol#940-942) is never used and should be removed
console.log(string,bool,bool) (console.sol#356-358) is never used and should be removed
console.log(string,bool,bool,address) (console.sol#936-938) is never used and should be removed
console.log(string,bool,bool,bool) (console.sol#932-934) is never used and should be removed
console.log(string,bool,bool,string) (console.sol#928-930) is never used and should be removed
console.log(string,bool,bool,uint256) (console.sol#924-926) is never used and should be removed
console.log(string,bool,string) (console.sol#352-354) is never used and should be removed
console.log(string,bool,string,address) (console.sol#920-922) is never used and should be removed
console.log(string,bool,string,bool) (console.sol#916-918) is never used and should be removed
console.log(string,bool,string,string) (console.sol#912-914) is never used and should be removed
console.log(string,bool,string,uint256) (console.sol#908-910) is never used and should be removed
console.log(string,bool,uint256) (console.sol#348-350) is never used and should be removed
console.log(string,bool,uint256,address) (console.sol#904-906) is never used and should be removed
console.log(string,bool,uint256,bool) (console.sol#900-902) is never used and should be removed
console.log(string,bool,uint256,string) (console.sol#896-898) is never used and should be removed
console.log(string,bool,uint256,uint256) (console.sol#892-894) is never used and should be removed
console.log(string,string) (console.sol#208-210) is never used and should be removed
console.log(string,string,address) (console.sol#344-346) is never used and should be removed
console.log(string,string,address,address) (console.sol#888-890) is never used and should be removed
console.log(string,string,address,bool) (console.sol#884-886) is never used and should be removed
console.log(string,string,address,string) (console.sol#880-882) is never used and should be removed
console.log(string,string,address,uint256) (console.sol#876-878) is never used and should be removed
console.log(string,string,bool) (console.sol#340-342) is never used and should be removed
console.log(string,string,bool,address) (console.sol#872-874) is never used and should be removed
console.log(string,string,bool,bool) (console.sol#868-870) is never used and should be removed
console.log(string,string,bool,string) (console.sol#864-866) is never used and should be removed
console.log(string,string,bool,uint256) (console.sol#860-862) is never used and should be removed
console.log(string,string,string) (console.sol#336-338) is never used and should be removed
console.log(string,string,string,address) (console.sol#856-858) is never used and should be removed
console.log(string,string,string,bool) (console.sol#852-854) is never used and should be removed
console.log(string,string,string,string) (console.sol#848-850) is never used and should be removed
console.log(string,string,string,uint256) (console.sol#844-846) is never used and should be removed
console.log(string,string,uint256) (console.sol#332-334) is never used and should be removed
console.log(string,string,uint256,address) (console.sol#840-842) is never used and should be removed
console.log(string,string,uint256,bool) (console.sol#836-838) is never used and should be removed
console.log(string,string,uint256,string) (console.sol#832-834) is never used and should be removed
console.log(string,string,uint256,uint256) (console.sol#828-830) is never used and should be removed
console.log(string,uint256) (console.sol#204-206) is never used and should be removed
console.log(string,uint256,address) (console.sol#328-330) is never used and should be removed
console.log(string,uint256,address,address) (console.sol#824-826) is never used and should be removed
console.log(string,uint256,address,bool) (console.sol#820-822) is never used and should be removed
console.log(string,uint256,address,string) (console.sol#816-818) is never used and should be removed
console.log(string,uint256,address,uint256) (console.sol#812-814) is never used and should be removed
console.log(string,uint256,bool) (console.sol#324-326) is never used and should be removed
console.log(string,uint256,bool,address) (console.sol#808-810) is never used and should be removed
console.log(string,uint256,bool,bool) (console.sol#804-806) is never used and should be removed
console.log(string,uint256,bool,string) (console.sol#800-802) is never used and should be removed
console.log(string,uint256,bool,uint256) (console.sol#796-798) is never used and should be removed
console.log(string,uint256,string) (console.sol#320-322) is never used and should be removed
console.log(string,uint256,string,address) (console.sol#792-794) is never used and should be removed
console.log(string,uint256,string,bool) (console.sol#788-790) is never used and should be removed
console.log(string,uint256,string,string) (console.sol#784-786) is never used and should be removed
console.log(string,uint256,string,uint256) (console.sol#780-782) is never used and should be removed
console.log(string,uint256,uint256) (console.sol#316-318) is never used and should be removed
console.log(string,uint256,uint256,address) (console.sol#776-778) is never used and should be removed
console.log(string,uint256,uint256,bool) (console.sol#772-774) is never used and should be removed
console.log(string,uint256,uint256,string) (console.sol#768-770) is never used and should be removed
console.log(string,uint256,uint256,uint256) (console.sol#764-766) is never used and should be removed
console.log(uint256) (console.sol#172-174) is never used and should be removed
console.log(uint256,address) (console.sol#200-202) is never used and should be removed
console.log(uint256,address,address) (console.sol#312-314) is never used and should be removed
console.log(uint256,address,address,address) (console.sol#760-762) is never used and should be removed
console.log(uint256,address,address,bool) (console.sol#756-758) is never used and should be removed
console.log(uint256,address,address,string) (console.sol#752-754) is never used and should be removed
console.log(uint256,address,address,uint256) (console.sol#748-750) is never used and should be removed
console.log(uint256,address,bool) (console.sol#308-310) is never used and should be removed
console.log(uint256,address,bool,address) (console.sol#744-746) is never used and should be removed
console.log(uint256,address,bool,bool) (console.sol#740-742) is never used and should be removed
console.log(uint256,address,bool,string) (console.sol#736-738) is never used and should be removed
console.log(uint256,address,bool,uint256) (console.sol#732-734) is never used and should be removed
console.log(uint256,address,string) (console.sol#304-306) is never used and should be removed
console.log(uint256,address,string,address) (console.sol#728-730) is never used and should be removed
console.log(uint256,address,string,bool) (console.sol#724-726) is never used and should be removed
console.log(uint256,address,string,string) (console.sol#720-722) is never used and should be removed
console.log(uint256,address,string,uint256) (console.sol#716-718) is never used and should be removed
console.log(uint256,address,uint256) (console.sol#300-302) is never used and should be removed
console.log(uint256,address,uint256,address) (console.sol#712-714) is never used and should be removed
console.log(uint256,address,uint256,bool) (console.sol#708-710) is never used and should be removed
console.log(uint256,address,uint256,string) (console.sol#704-706) is never used and should be removed
console.log(uint256,address,uint256,uint256) (console.sol#700-702) is never used and should be removed
console.log(uint256,bool) (console.sol#196-198) is never used and should be removed
console.log(uint256,bool,address) (console.sol#296-298) is never used and should be removed
```

Smart Contract Audit

```
console.log(uint256,bool,address,address) (console.sol#600-606) is never used and should be removed
console.log(uint256,bool,address,bool) (console.sol#692-694) is never used and should be removed
console.log(uint256,bool,address,string) (console.sol#688-696) is never used and should be removed
console.log(uint256,bool,address,uint256) (console.sol#684-688) is never used and should be removed
console.log(uint256,bool,bool) (console.sol#232-294) is never used and should be removed
console.log(uint256,bool,bool,address) (console.sol#880-882) is never used and should be removed
console.log(uint256,bool,bool,bool) (console.sol#676-678) is never used and should be removed
console.log(uint256,bool,bool,string) (console.sol#672-674) is never used and should be removed
console.log(uint256,bool,bool,uint256) (console.sol#668-670) is never used and should be removed
console.log(uint256,bool,string) (console.sol#288-290) is never used and should be removed
console.log(uint256,bool,string,address) (console.sol#664-666) is never used and should be removed
console.log(uint256,bool,string,bool) (console.sol#660-662) is never used and should be removed
console.log(uint256,bool,string,string) (console.sol#656-658) is never used and should be removed
console.log(uint256,bool,string,uint256) (console.sol#652-654) is never used and should be removed
console.log(uint256,bool,uint256) (console.sol#284-286) is never used and should be removed
console.log(uint256,bool,uint256,address) (console.sol#648-650) is never used and should be removed
console.log(uint256,bool,uint256,bool) (console.sol#644-646) is never used and should be removed
console.log(uint256,bool,uint256,string) (console.sol#640-642) is never used and should be removed
console.log(uint256,bool,uint256,uint256) (console.sol#636-638) is never used and should be removed
console.log(uint256,string) (console.sol#192-194) is never used and should be removed
console.log(uint256,string,address) (console.sol#200-282) is never used and should be removed
console.log(uint256,string,address,address) (console.sol#632-634) is never used and should be removed
console.log(uint256,string,address,bool) (console.sol#628-630) is never used and should be removed
console.log(uint256,string,address,string) (console.sol#624-626) is never used and should be removed
console.log(uint256,string,address,uint256) (console.sol#620-622) is never used and should be removed
console.log(uint256,string,bool) (console.sol#276-278) is never used and should be removed
console.log(uint256,string,bool,address) (console.sol#616-618) is never used and should be removed
console.log(uint256,string,bool,bool) (console.sol#612-614) is never used and should be removed
console.log(uint256,string,bool,string) (console.sol#608-610) is never used and should be removed
console.log(uint256,string,bool,uint256) (console.sol#604-606) is never used and should be removed
console.log(uint256,string,string) (console.sol#272-274) is never used and should be removed
console.log(uint256,string,string,address) (console.sol#600-602) is never used and should be removed
console.log(uint256,string,string,bool) (console.sol#596-598) is never used and should be removed
console.log(uint256,string,string,string) (console.sol#592-594) is never used and should be removed
console.log(uint256,string,string,uint256) (console.sol#588-590) is never used and should be removed
console.log(uint256,string,uint256) (console.sol#268-270) is never used and should be removed
console.log(uint256,string,uint256,address) (console.sol#584-586) is never used and should be removed
console.log(uint256,string,uint256,bool) (console.sol#580-582) is never used and should be removed
console.log(uint256,string,uint256,string) (console.sol#576-578) is never used and should be removed
console.log(uint256,string,uint256,uint256) (console.sol#572-574) is never used and should be removed
console.log(uint256,uint256) (console.sol#188-190) is never used and should be removed
console.log(uint256,uint256,address) (console.sol#264-266) is never used and should be removed
console.log(uint256,uint256,address,address) (console.sol#568-570) is never used and should be removed
console.log(uint256,uint256,address,bool) (console.sol#564-566) is never used and should be removed
console.log(uint256,uint256,address,string) (console.sol#560-562) is never used and should be removed
console.log(uint256,uint256,address,uint256) (console.sol#556-558) is never used and should be removed
console.log(uint256,uint256,bool) (console.sol#260-262) is never used and should be removed
console.log(uint256,uint256,bool,address) (console.sol#552-554) is never used and should be removed
console.log(uint256,uint256,bool,bool) (console.sol#548-550) is never used and should be removed
console.log(uint256,uint256,bool,string) (console.sol#544-546) is never used and should be removed
console.log(uint256,uint256,bool,uint256) (console.sol#540-542) is never used and should be removed
console.log(uint256,uint256,string) (console.sol#256-258) is never used and should be removed
console.log(uint256,uint256,string,address) (console.sol#536-538) is never used and should be removed
console.log(uint256,uint256,string,bool) (console.sol#532-534) is never used and should be removed
console.log(uint256,uint256,string,string) (console.sol#528-530) is never used and should be removed
console.log(uint256,uint256,string,uint256) (console.sol#524-526) is never used and should be removed
console.log(uint256,uint256,uint256) (console.sol#252-254) is never used and should be removed
console.log(uint256,uint256,uint256,address) (console.sol#520-522) is never used and should be removed
console.log(uint256,uint256,uint256,bool) (console.sol#516-518) is never used and should be removed
console.log(uint256,uint256,uint256,string) (console.sol#512-514) is never used and should be removed
console.log(uint256,uint256,uint256,uint256) (console.sol#508-510) is never used and should be removed
console.log(address,address) (console.sol#36-38) is never used and should be removed
console.log(bool,bool) (console.sol#32-34) is never used and should be removed
console.log(bytes(bytes)) (console.sol#40-42) is never used and should be removed
console.log(bytes1(bytes1)) (console.sol#44-46) is never used and should be removed
console.log(bytes10(bytes10)) (console.sol#80-82) is never used and should be removed
console.log(bytes11(bytes11)) (console.sol#84-86) is never used and should be removed
console.log(bytes12(bytes12)) (console.sol#88-90) is never used and should be removed
console.log(bytes13(bytes13)) (console.sol#92-94) is never used and should be removed
console.log(bytes14(bytes14)) (console.sol#96-98) is never used and should be removed
console.log(bytes15(bytes15)) (console.sol#100-102) is never used and should be removed
console.log(bytes16(bytes16)) (console.sol#104-106) is never used and should be removed
console.log(bytes17(bytes17)) (console.sol#108-110) is never used and should be removed
console.log(bytes18(bytes18)) (console.sol#112-114) is never used and should be removed
console.log(bytes19(bytes19)) (console.sol#116-118) is never used and should be removed
console.log(bytes2(bytes2)) (console.sol#48-50) is never used and should be removed
console.log(bytes20(bytes20)) (console.sol#120-122) is never used and should be removed
console.log(bytes21(bytes21)) (console.sol#124-126) is never used and should be removed
console.log(bytes22(bytes22)) (console.sol#128-130) is never used and should be removed
console.log(bytes23(bytes23)) (console.sol#132-134) is never used and should be removed
console.log(bytes24(bytes24)) (console.sol#136-138) is never used and should be removed
console.log(bytes25(bytes25)) (console.sol#140-142) is never used and should be removed
console.log(bytes26(bytes26)) (console.sol#144-146) is never used and should be removed
console.log(bytes27(bytes27)) (console.sol#148-150) is never used and should be removed
console.log(bytes28(bytes28)) (console.sol#152-154) is never used and should be removed
console.log(bytes29(bytes29)) (console.sol#156-158) is never used and should be removed
```

Smart Contract Audit

```
console.logBytes3(bytes3) (console.sol#52-54) is never used and should be removed
console.logBytes30(bytes30) (console.sol#100-102) is never used and should be removed
console.logBytes31(bytes31) (console.sol#104-106) is never used and should be removed
console.logBytes32(bytes32) (console.sol#108-110) is never used and should be removed
console.logBytes4(bytes4) (console.sol#56-58) is never used and should be removed
console.logBytes5(bytes5) (console.sol#60-62) is never used and should be removed
console.logBytes6(bytes6) (console.sol#64-66) is never used and should be removed
console.logBytes7(bytes7) (console.sol#68-70) is never used and should be removed
console.logBytes8(bytes8) (console.sol#72-74) is never used and should be removed
console.logBytes9(bytes9) (console.sol#76-78) is never used and should be removed
console.logInt(int256) (console.sol#79-82) is never used and should be removed
console.logString(string) (console.sol#20-30) is never used and should be removed
console.logUint(uint256) (console.sol#24-26) is never used and should be removed
Reference: https://github.com/crytic/sllither/wiki/Detector-Documentation#dead-code

Pragma version^0.8.0 (Context.sol#3) necessitates a version too recent to be trusted. Consider deploying with 0.6.12/0.7.6
Pragma version^0.8.0 (ERC20.sol#3) necessitates a version too recent to be trusted. Consider deploying with 0.6.12/0.7.6
Pragma version^0.8.0 (EvlrStaker.sol#1) necessitates a version too recent to be trusted. Consider deploying with 0.6.12/0.7.6
Pragma version^0.8.0 (ERC20.sol#3) necessitates a version too recent to be trusted. Consider deploying with 0.6.12/0.7.6
Pragma version^0.8.0 (ERC20Metadata.sol#3) necessitates a version too recent to be trusted. Consider deploying with 0.6.12/0.7.6
Pragma version=0.6.2 (IPancakeRouter01.sol#1) allows old versions
Pragma version=0.6.2 (IPancakeRouter02.sol#1) allows old versions
Pragma version^0.8.0 (VlrContract.sol#2) necessitates a version too recent to be trusted. Consider deploying with 0.6.12/0.7.6
Pragma version<=0.4.22<0.9.0 (console.sol#2) is too complex
solc-0.8.7 is not recommended for deployment
Reference: https://github.com/crytic/sllither/wiki/Detector-Documentation#incorrect-versions-of-solidity

Parameter EvlrStaker.stake(uint256), _stakedVlrAmount (EvlrStaker.sol#96) is not in mixedCase
Parameter EvlrStaker.stakeWithTimeParameters(uint256,uint256,uint256), _startTime (EvlrStaker.sol#141) is not in mixedCase
Parameter EvlrStaker.stakeWithTimeParameters(uint256,uint256,uint256), _stopTime (EvlrStaker.sol#142) is not in mixedCase
Parameter EvlrStaker.stakeWithTimeParameters(uint256,uint256,uint256), _stakedVlrAmount (EvlrStaker.sol#143) is not in mixedCase
Parameter EvlrStaker.unstake(uint256), _unstakedAmount (EvlrStaker.sol#188) is not in mixedCase
Function IPancakeRouter01.WETH() (IPancakeRouter01.sol#5) is not in mixedCase
Contract console (console.sol#4-1532) is not in CapWords
Reference: https://github.com/crytic/sllither/wiki/Detector-Documentation#conformance-to-solidity-naming-conventions

Variable IPancakeRouter01.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256),_amountADesired (IPancakeRouter01.sol#10) is too similar to IPancakeRouter01.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256),_amountBDesired (IPancakeRouter01.sol#11)
Reference: https://github.com/crytic/sllither/wiki/Detector-Documentation#variable-names-are-too-similar

EvlrStaker.sllitherConstructorVariables() (EvlrStaker.sol#138-321) uses literals with too many digits:
- burnAddress = 0xb000000000000000000000000000000000000000000000000000000000000000 (EvlrStaker.sol#24)
console.sllitherConstructorConstantVariables() (console.sol#4-1532) uses literals with too many digits:
- CONSOLE_ADDRESS = address(0xb000000000000000000000000000000000000000000000000000000000000000) (console.sol#5)
Reference: https://github.com/crytic/sllither/wiki/Detector-Documentation#too-many-digits

EvlrStaker.burnAddress (EvlrStaker.sol#24) should be constant
Reference: https://github.com/crytic/sllither/wiki/Detector-Documentation#state-variables-that-could-be-declared-constant

name() should be declared external:
- ERC20.name() (ERC20.sol#63-83)
symbol() should be declared external:
- ERC20.symbol() (ERC20.sol#69-71)
decimals() should be declared external:
- ERC20.decimals() (ERC20.sol#88-88)
transfer(address,uint256) should be declared external:
- ERC20.transfer(address,uint256) (ERC20.sol#112-115)
allowance(address,address) should be declared external:
- ERC20.allowance(address,address) (ERC20.sol#120-122)
approve(address,uint256) should be declared external:
- ERC20.approve(address,uint256) (ERC20.sol#131-134)
transferFrom(address,address,uint256) should be declared external:
- ERC20.transferFrom(address,address,uint256) (ERC20.sol#149-163)
increaseAllowance(address,uint256) should be declared external:
- ERC20.increaseAllowance(address,uint256) (ERC20.sol#177-180)
decreaseAllowance(address,uint256) should be declared external:
- ERC20.decreaseAllowance(address,uint256) (ERC20.sol#196-204)
stake(uint256) should be declared external:
- EvlrStaker.stake(uint256) (EvlrStaker.sol#96-138)
stakeWithTimeParameters(uint256,uint256,uint256) should be declared external:
- EvlrStaker.stakeWithTimeParameters(uint256,uint256,uint256) (EvlrStaker.sol#140-186)
getContractAddress() should be declared external:
- VlrContract.getContractAddress() (VlrContract.sol#13-15)
Reference: https://github.com/crytic/sllither/wiki/Detector-Documentation#public-function-that-could-be-declared-external
```

MythX: -

Report for EvlrStaker.sol
<https://dashboard.mythx.io/#/console/analyses/aff9cfb6-196e-45d4-9e21-d8984a2bfc19>

Line	SWC Title	Severity	Short Description
10	(SWC-103) Floating Pragma	Low	A floating pragma is set.

Smart Contract Audit

Mythril: -

```
root@sv-VirtualBox:/home/sv/ValerStudios_Ubuntu# myth analyze EvlrStaker.sol
The analysis was completed successfully. No issues were detected.
```

Solhint: -

Lint results:

```
EvlrStaker.sol:10:1: Error: Compiler version ^0.8.0 does not satisfy the r-semver requirement
```

```
EvlrStaker.sol:29:5: Error: Explicitly mark visibility in function (Set |ignoreConstructors to true if using solidity >=0.7.0)
```

```
EvlrStaker.sol:124:25: Error: Avoid to make time-based decisions in your business logic
```

```
EvlrStaker.sol:250:56: Error: Avoid to make time-based decisions in your business logic
```

```
EvlrStaker.sol:252:49: Error: Avoid to make time-based decisions in your business logic
```

```
EvlrStaker.sol:266:39: Error: Avoid to make time-based decisions in your business logic
```

```
EvlrStaker.sol:311:43: Error: Avoid to make time-based decisions in your business logic
```

Smart Contract Audit

Basic Coding Bugs

No.	Name	Description	Severity	Result
1.	Constructor Mismatch	Whether the contract name and its constructor are not identical to each other.	Critical	PASSED
2.	Ownership Takeover	Whether the set owner function is not protected.	Critical	PASSED
3.	Redundant Fallback Function	Whether the contract has a redundant fallback function.	Critical	PASSED
4.	Overflows & Underflows	Whether the contract has general overflow or underflow vulnerabilities	Critical	PASSED
5.	Reentrancy	Reentrancy is an issue when code can call back into your contract and change state, such as withdrawing ETHs	Critical	PASSED
6.	MONEY-Giving Bug	Whether the contract returns funds to an arbitrary address	High	PASSED
7.	Blackhole	Whether the contract locks ETH indefinitely: merely in without out	High	PASSED
8.	Unauthorized Self-Destruct	Whether the contract can be killed by any arbitrary address	Medium	PASSED

Smart Contract Audit

9.	Revert DoS	Whether the contract is vulnerable to DoS attack because of unexpected revert	Medium	PASSED
10.	Unchecked External Call	Whether the contract has any external call without checking the return value	Medium	PASSED
11.	Gasless Send	Whether the contract is vulnerable to gasless send	Medium	PASSED
12.	Send Instead of Transfer	Whether the contract uses send instead of transfer	Medium	PASSED
13.	Costly Loop	Whether the contract has any costly loop which may lead to Out-Of-Gas exception	Medium	PASSED
14.	(Unsafe) Use of Untrusted Libraries	Whether the contract use any suspicious libraries	Medium	PASSED
15.	(Unsafe) Use of Predictable Variables	Whether the contract contains any randomness variable, but its value can be predicated	Medium	PASSED
16.	Transaction Ordering Dependence	Whether the final state of the contract depends on the order of the transactions	Medium	PASSED

Smart Contract Audit

17.	Deprecated Uses	Whether the contract use the deprecated tx.origin to perform the authorization	Medium	PASSED
18.	Semantic Consistency Checks	Whether the semantic of the white paper is different from the implementation of the contract	Critical	PASSED

Conclusion

In this audit, we thoroughly analyzed VALERSTUDIOS's EvlrStaker Smart Contract. The current code base is well organized but there are promptly some low-level issues found in this phase of Smart Contract Audit.

Meanwhile, we need to emphasize that smart contracts as a whole are still in an early, but exciting stage of development. To improve this report, we greatly appreciate any constructive feedbacks or suggestions, on our methodology, audit findings, or potential gaps in scope/coverage.

About eNebula Solutions

We believe that people have a fundamental need to security and that the use of secure solutions enables every person to more freely use the Internet and every other connected technology. We aim to provide security consulting service to help others make their solutions more resistant to unauthorized access to data & inadvertent manipulation of the system. We support teams from the design phase through the production to launch and surely after.

The eNebula Solutions team has skills for reviewing code in C, C++, Python, Haskell, Rust, Node.js, Solidity, Go, and JavaScript for common security vulnerabilities & specific attack vectors. The team has reviewed implementations of cryptographic protocols and distributed system architecture, including in cryptocurrency, blockchains, payments, and smart contracts. Additionally, the team can utilize various tools to scan code & networks and build custom tools as necessary.

Although we are a small team, we surely believe that we can have a momentous impact on the world by being translucent and open about the work we do.

For more information about our security consulting, please mail us at – contact@enebula.in